



Software de Programação T199

Faça o download do software de Programação no site da Rycco Telecom:


<https://www.ryccotelecom.com.br/radio-t199>

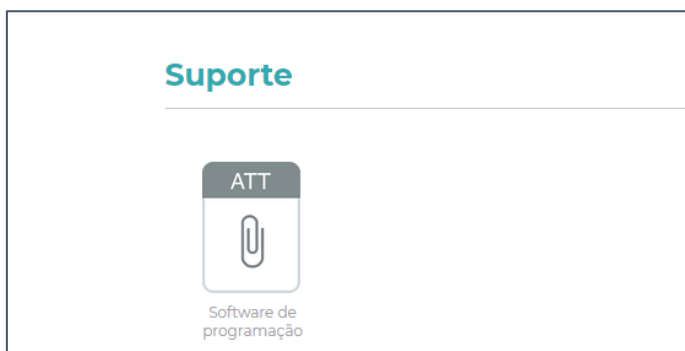


1. Primeiro abra a pasta MSCOMM.

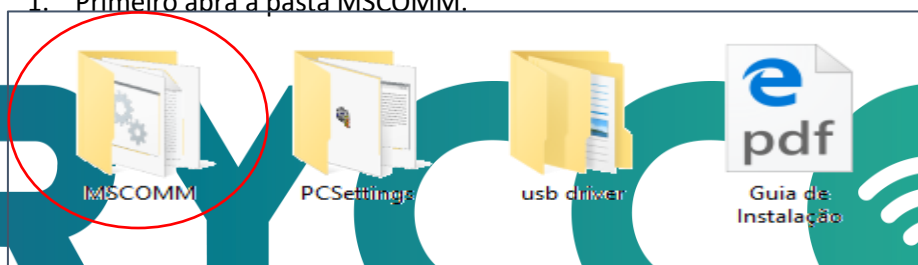


2. Em seguida, clique com o botão direito do mouse em "ExecuteMe.BAT", como administrador para executar.

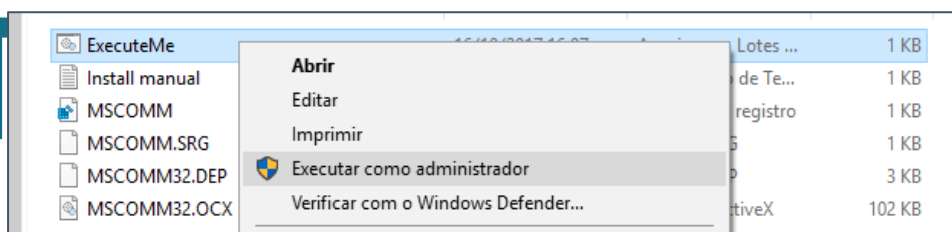


3. Em seguida Clique em Ok na mensagem de Êxito.

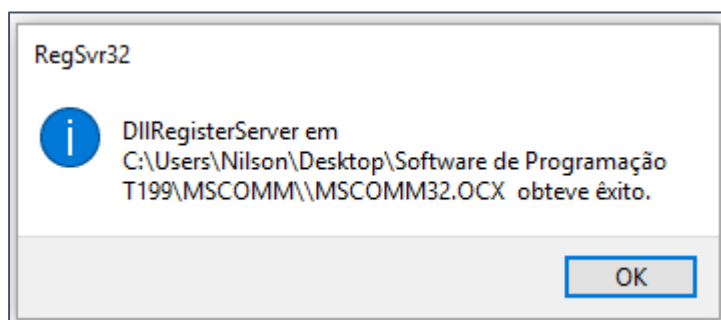


4. Volte à página e abra a pasta Drive USB

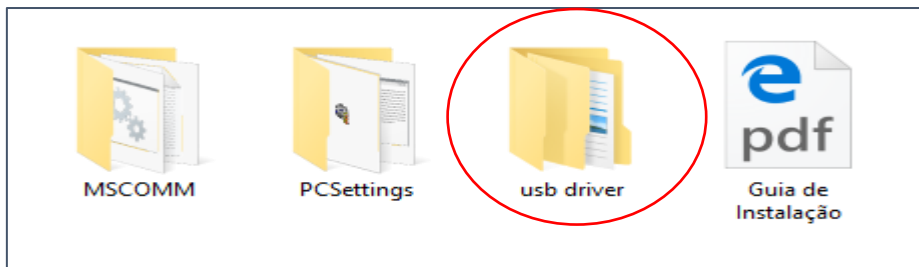


5. e instale o arquivo “CP210xVCPInstaller”, de acordo com seu sistema Operacional “x64 ou x86”.

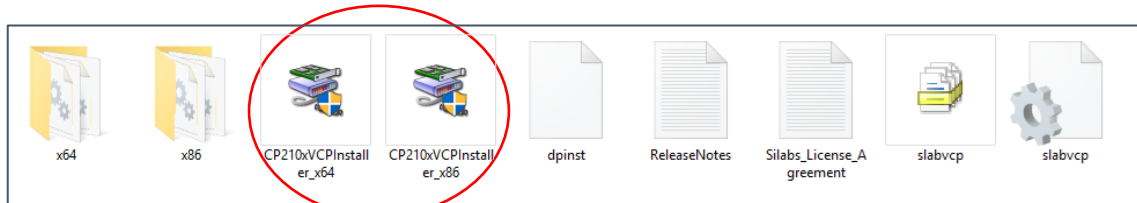


6. Após concluir todas as etapas acima, volte a página e abra a pasta “PCSettings”.

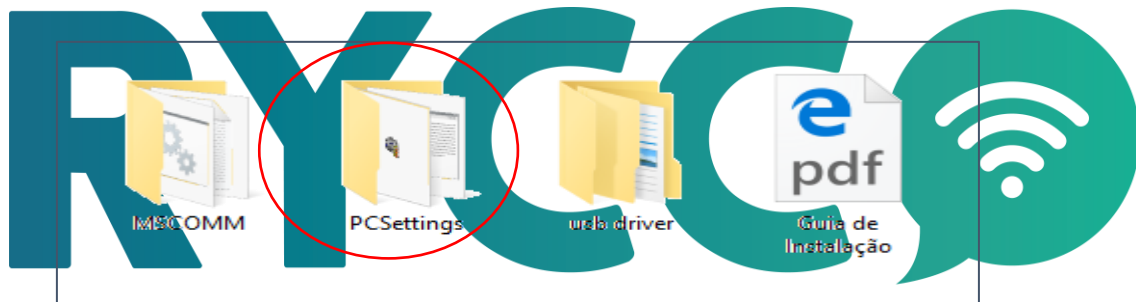


7. Execute o arquivo “PC SettingsEN”.

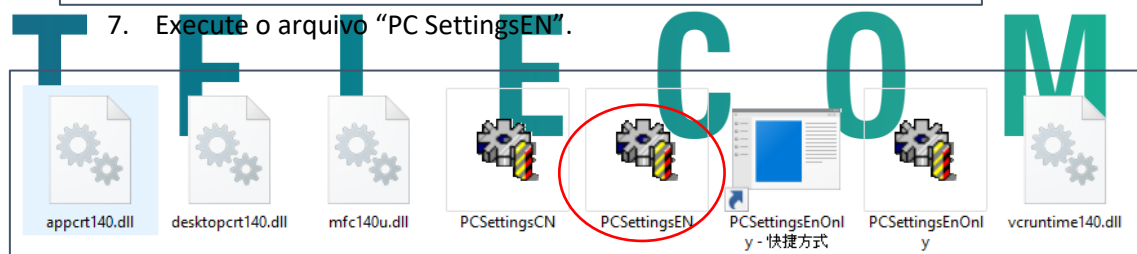

8. Conecte o cabo de programação a equipamento e ao computador.

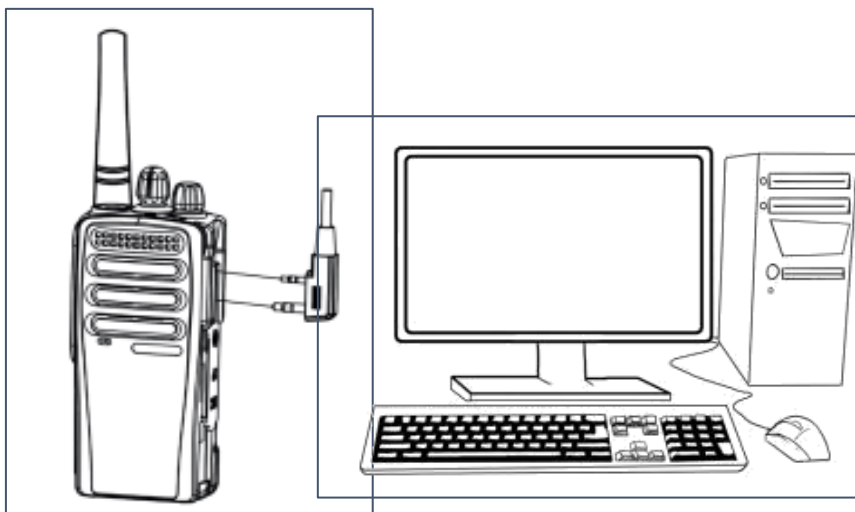


9. Selecione a porta e clique em Connect.

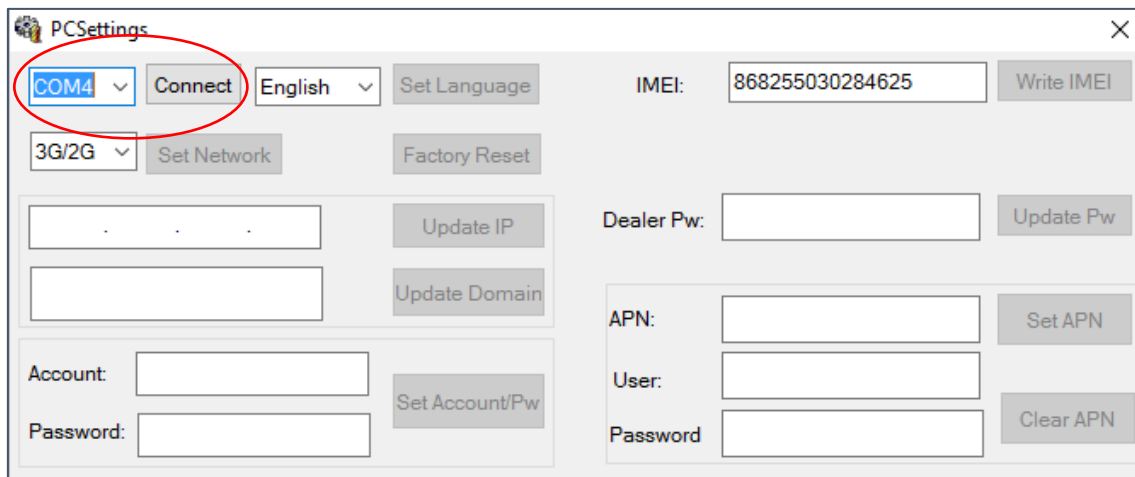

The PCSettings window displays various configuration options. The 'COM4' dropdown menu is highlighted with a red circle, and the 'Connect' button is also highlighted with a red circle. Other visible fields include IMEI (868255030284625), 3G/2G, Set Language, Set Network, Factory Reset, Update IP, Update Domain, Account, Password, Dealer Pw, Update Pw, APN, Set APN, User, Clear APN, and Set Account/Pw.

10. No campo Update IP digite o endereço do servido "47.254.30.180", conecte o equipamento na rede Wi-Fi (caso não esteja utilizando SIM CARD), verifique se **GPS Raw data** está com a opção "Open GPS" selecionada, para finalizar as configurações clique em **Update IP**.

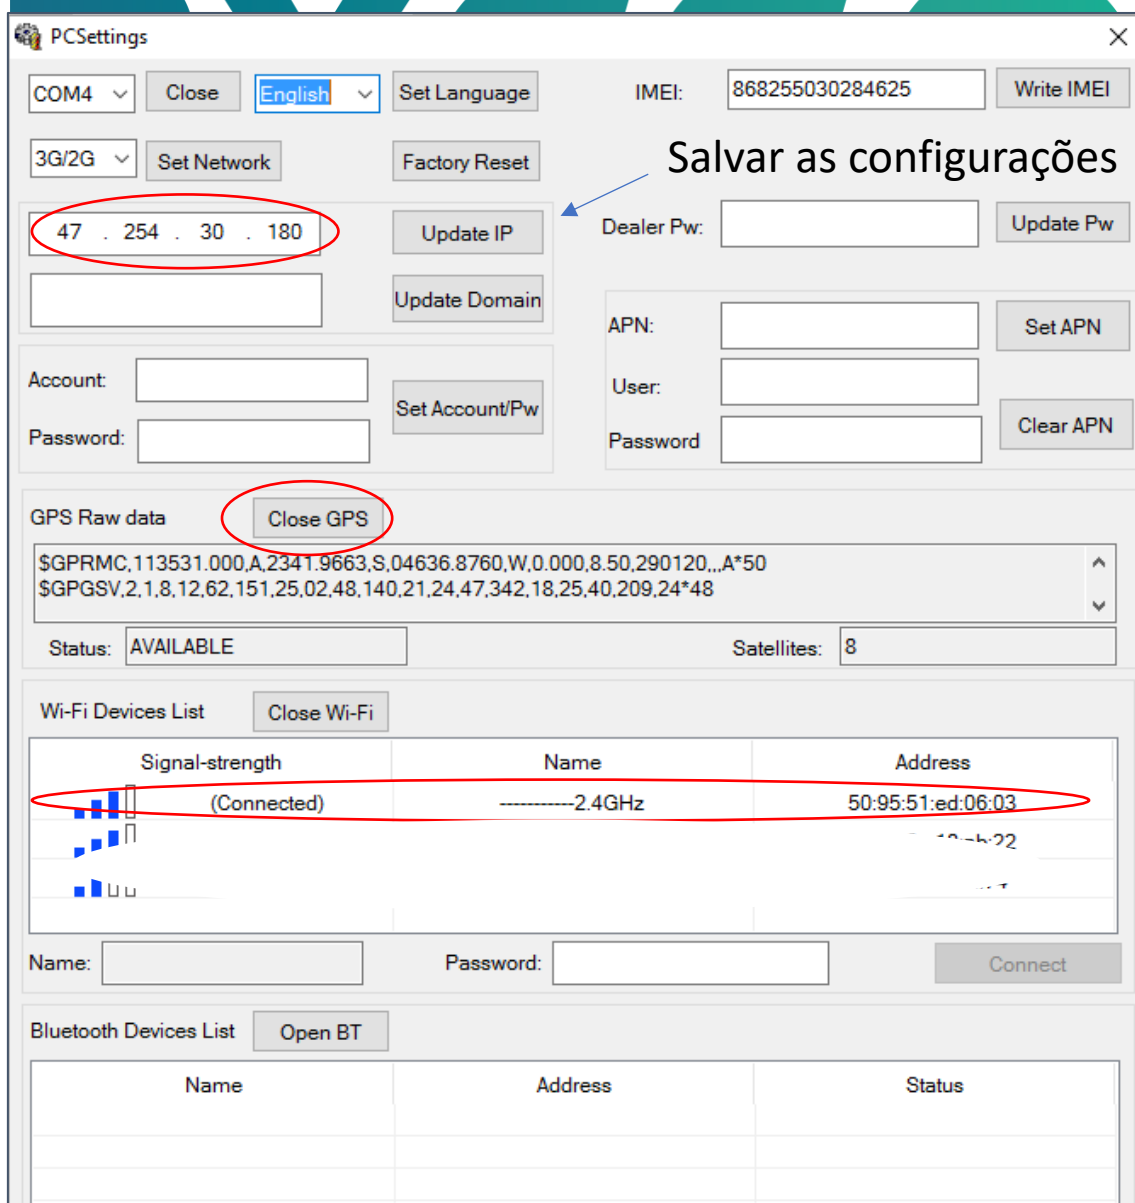

The PCSettings window shows the 'Update IP' field with the IP address '47.254.30.180' entered, highlighted by a red circle. The 'Close GPS' button is also highlighted with a red circle. The 'Wi-Fi Devices List' section shows a table with columns for Signal-strength, Name, and Address. The first row is highlighted with a red circle, showing '(Connected)', '-----2.4GHz', and '50:95:51:ed:06:03'. The 'Status' is 'AVAILABLE' and 'Satellites' is '8'. The 'Bluetooth Devices List' section is also visible.

Salvar as configurações

Signal-strength	Name	Address
(Connected)	-----2.4GHz	50:95:51:ed:06:03